

TUNABLE COLOR
3000K-4000K-5000K




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Bronze Finish
- Tunable CCT (3000K/4000K/5000K)
- IP65 Rating - Suitable for Wet Locations
- 120-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- 0-10V Dimming
- Striped Clear Plastic Lens
- DLC Premium Listed
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -22°F to 113°F (-30°C to 45°C)


PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLCN11-40WBSP1DA1	L40WTUNCNSCL11	40	4800	3000	8.03 x 8.03 x 3.66	120 - 145	160°
			5400	4000			
			5400	5000			

Luminous Intensity Distribution Curve

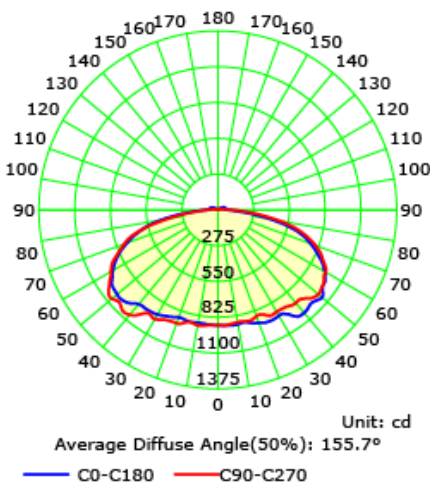

The Average Illuminance Effective Figure

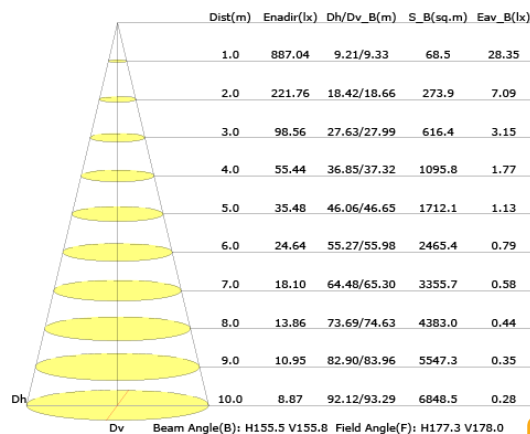

DIAGRAM

