



LED SQUARE CANOPY

Tunable Wattage & CCT



PRODUCT FEATURES


- **Tunable CCT** - 3000K / 4000K / 5000K
- **Tunable Power** - 30W / 40W / 50W
- Die-Cast Aluminum Alloy Housing
- Bronze Finish
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- 0-10V Dimming
- Striped Clear Plastic Lens
- IP65 Rating - Suitable for Wet Locations
- DLC Listed
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -40°F to 113°F (-40°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLCN12-50WFGHTCP (XX)	L50WTUNCNSCL12	30	3600	3000	11.00 x 11.00 x 3.34	120	150°
		40	4800	4000			
		50	6000	5000			

TCP = CCT adjustable / POWER adjustable, CCT:30K/40K/50K POWER:30W/40W/50W
(XX) can be blank = no sensor function, MS = Microwave sensor, PT = Photocontrol

DIAGRAM

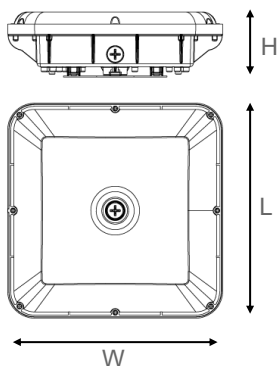

TUNABLE SWITCHES

