




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Black Finish
- IP65 Rating - Suitable for Wet Locations
- 120-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 0-10V, PWM, VR
- Clear PC Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL Certified
- Operating Temperature: -40°F to 122°F (-40°C to 50°C)


PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
CLU11-240WS1BT2-BH50K	L240W5KUFOCL11P	240	36,900	5000	Ø 12.2 x .98	154	110°

DIAGRAM

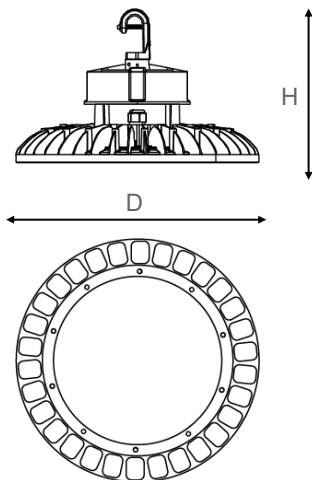

PHOTOMETRY

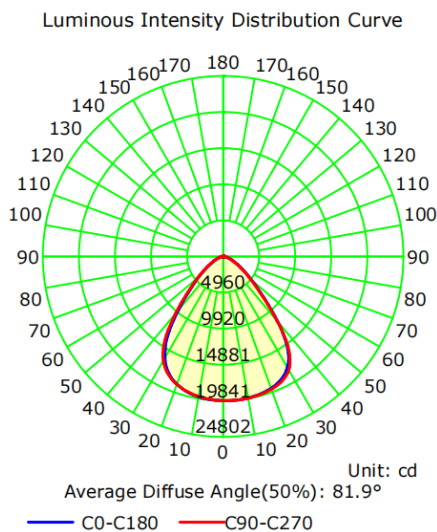

The Average Illuminance Effective Figure

Height	Avg./Nadir, E	Beam Angle: 81.6°	Diameter / Area
1.0m	0809.70/ 19811.79lx		1.73m / 2.34sq.m
2.0m	2702.43/ 4952.95lx		3.45m / 9.37sq.m
3.0m	1201.08/ 2201.31lx		5.18m / 21.09sq.m
4.0m	675.61/ 1238.24lx		6.91m / 37.49sq.m
5.0m	432.39/ 792.47lx		8.64m / 58.57sq.m
6.0m	300.27/ 550.33lx		10.36m / 84.35sq.m
7.0m	220.61/ 404.32lx		12.09m / 114.81sq.m
8.0m	168.90/ 309.56lx		13.82m / 149.95sq.m
9.0m	133.45/ 244.59lx		15.54m / 189.78sq.m
10.0m	108.10/ 198.12lx		17.27m / 234.30sq.m

Flux Out: 25376.97lm

